









ITW HIGH SPEED DOOR

PRODUCT RANGE

VERTICAL HIGH SPEED DOORS

SPIRAL DOOR



Opening speed up to 2.0 m/s



Door size up to 6.000 mm x 6.000 mm



Resistance against wind load up to class 3



Contactless protection by a light grid



Thermally separated profiles



Smooth running due to plastic spiral







HORIZONTAL HIGH SPEED DOORS

IMMEDIATELY FULL CLEARANCE



Opening speed up to 3.0 m/s



Door size up to 6.000 mm x 6.000 mm



Resistance against wind load up to class 2



Crash protection



Escape route approval



Can be used indoors and outdoors



In the area of transport systems



Also available in stainless steel for food processing plants



VERTICAL HIGH SPEED DOORS

COUNTLESS POSSIBILITIES



Opening speed up to 2.0 m/s



Door size up to 12.000 mm x 10.000 mm



Resistance against wind load up to class 4



Crash protection



Can be used indoors and outdoors



Escape route




Clean room, chemical, pharmaceutical and Atex



For supermarkets, foodstuffs and in refrigerated or deep-freeze areas down to -28°





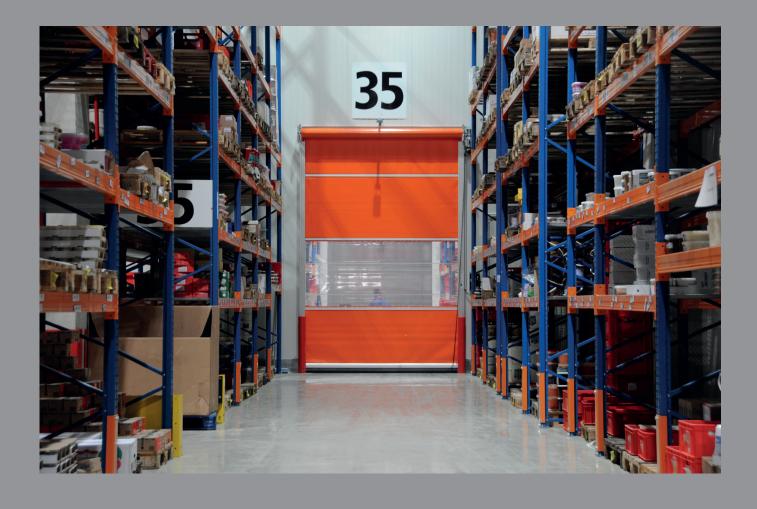



MACHINE PROTECTION DOOR

SAFETY FOR MAN AND MACHINE



Opening speed up to 3.0 m/s



Door size up to 8,000 mm x 5,000 mm



Use as movable safety guard



Optionally with LED Pro-Tec-TOR Actionlight as optical information system



Functional safety



Safety switch and emergency stop Performance level e

HORIZONTAL HIGH SPEED DOORS

FOLDING DOOR



Opening speed up to 2.0 m/s



Door size up to $5.000~\text{mm} \times 5.000~\text{mm}$



Wide range of applications in industry as interior and exterior door



Immediately full passage height



Individual design



Lowest lintel requirement for an exterior door





OUR FURTHER PRODUCT RANGE



SWING DOORS



STRIP CURTAINS



SECTIONAL DOORS



STEEL / ALUMINUM ROLLER DOORS



PRO-TEC-TOR USD



SPECIAL DOORS

SCOPE OF APPLICATION





















INDUSTRY

TRANSPORT

LOGISTICS

AUTOMOTIVE M. PROTECTIONS CLEAN ROOM SUPERMARKET

FOOD

COOLING AREA

ATEX

